

for posting

SDW



REQUEST FOR QUOTATION

DRN: FO1X-RICTMS-FIN-2022-08-33313-S
RFQ NO. 2022-pr00860
DATE: 1-Aug-2022

PPD-2022-09-455

POSTED

GEPS REF No: _____
DATE: 09/05/22
SIGNATURE: _____

COMPANY NAME :
COMPANY ADDRESS :
CONTACT PERSON :
CONTACT NO. :
COMPANY TIN :

Sir/Madam:

Please quote your government price/s including delivery charges, VAT or other applicable taxes, and other incidental expenses for the goods listed in Annex A. Failure to indicate TECHNICAL SPECIFICATIONS could be basis for non-compliance. Also, furnish us with the descriptive brochures, catalogues, literatures and/or samples, if applicable.

If you are the exclusive manufacturer, distributor or agent in the Philippines for the goods listed in Annex A please attach in your quotation a duly notarized certification to this effect.

Please submit this form together with Annex A to DSWD FO IX BAC OFFICE on or before Sept. 12, 2022 2022 @ 5:00 PM.

Very truly yours,

Corazon G. Sumicad
MA. CORAZON G. SUMICAD
CAO

Terms and Conditions:

PURPOSE : UPGRADING AND OF ICT EQUIPMENT FOR ONLINE EVENTS / ACTIVITIES.

PR NUMBER : 2022-08-0860

- 1. Award shall be made on per : ___ Item Basis ___xx_ Lot Basis
- 2. Quotation validity : 20 CALENDAR DAYS FROM BID OPENING
- 3. Delivery Period : 25 days after conforme on the P.O.
- 4. Delivery Area : DSWD FO-9, ZC
- 5. Terms of payment : WITH IN 60 WORKING DAYS
- 6. Liquidated Damages/Penalty : 1/10 of 1% of undelivered portion x No. of days of delay
- 7. In case of discrepancy between unit cost and total cost, unit cost shall prevail.
- 8. Warranty : N/A
- 9. Performance Security : N/A

9. Prospective supplier must be registered at the Philippine Government Electronic Procurement System (PhilGEPS). You may visit Philgeps website at www.philgeps.gov.ph and register for free.

Earlwynn C. Timbang
EARLWYNN C. TIMBANG
Regional Procurement Officer

(signature over printed name)
Supplier


PHILGEPS NO. _____
PHILGEPS EXPIRY _____

Department of Social Welfare and Development FOIX
BIDS AND AWARDS COMMITTEE
For Posting

Received by: *Fudang*
Date & Time: *09/05/22 @ 2:07 PM*
Remarks: _____

SPECIFICATIONS

1.2000VA UPS tower type 1600w

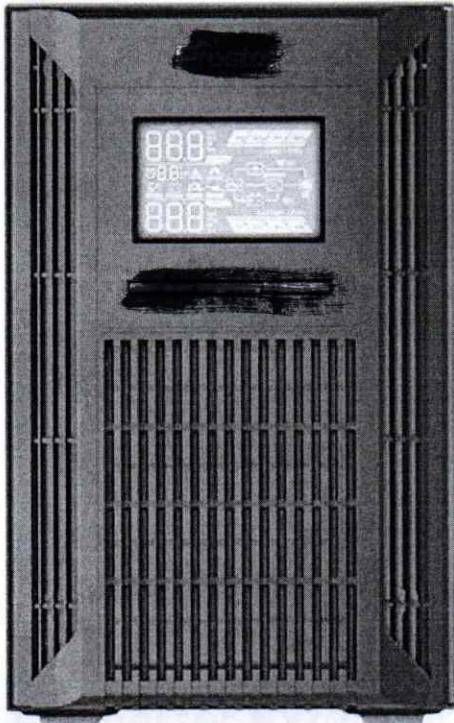

INPUT Voltage 200/208/220/230/240VAC
Voltage Range 110-300 VAC (Based on load at 50%)
160-280 VAC (Based on load at 100%)
Frequency Range 40Hz~70HZ OUTPUT
Output Voltage 200/208/220/230/240VAC
Voltage Regulation $\pm 1\%$
Frequency Range (Batt. Mode) 50 Hz or 60 Hz ± 0.1 Hz
Transfer Time AC to DC: zero /Inverter to Bypass:4ms
(Typical) Waveform (Batt. Mode) Pure Sinewave
BATTERY Battery Voltage 12V Battery number 9Ah*4
Typical Recharge Time 4 hours recover to 90% capacity
Maximum Charge(Max.) 1.0 A

General Specifications

Uninterruptible Power Supplies RS Components –
Internal LCD Load level, Battery level, AC mode, Battery
mode, Bypass mode, and Fault indicators ALARM Battery
Mode Sounding every 4 seconds Low battery Sounding
every second Overload Sounding twice every second

Fault Continuously sounding PHYSICAL Dimension, D*W*H (mm) 397*145*220 Net Weight(kgs)
17 ENVIRONMENT Humidity 20-90% RH@0-40°C(Non-condensing)

A handwritten signature in blue ink, appearing to read 'Kuyong Usay Jam aro Jr.', written over a faint digital signature line.

Digitally signed by
Kuyong
Usay Jam
aro Jr.

Date: 2022.08.25 14:17:
20+08'00'

2. Video Switcher for Broadcast Livestream Studio with Audio Switching Software



- 4-Channel Live Stream HDMI Switcher
- Control up to Four BMPCC 6K/4K Cameras
- Live Tally, Stream and Record Status
- Record Button, Channel Preview Multiview

3. 5.8G Wireless HD Video Transmitter and Receiver 200M 1080P 60Hz HDMI Compatible Audio Video Converter Extender for Camera, TV, PC



- Package : Yes

- Brand Name : Connector B : HDMI
- Gender : Female-Female
- Certification : CE
- Model Number : Wireless transmitter and receiver


200M

- Origin : CN(Origin)
- Type : HDMI Cables-compatible
- Version : HDMI 1.4
- Connector A : HDMI
- Bundle : Bundle 1
- Packing : Polybag

Digitally signed
by Kuyong
Usay Jamaro Jr.
Date: 2022.08.25
14:17:32+08'00'

- Shielding : Non-Shielded
- Feature : HDMI 1.4-compatible
- Application : Projector, Telephone, Multimedia, Monitor, TV Box, DVD Player, Television
- Outer Diameter : mini
- Transmission distance : 200m HDMI-Compatible extender
- Video resolution : 1080P 60hz extender
- Support unidirectional IR signal : HDMI-Compatible extender
- Outer diameter : HDMI-Compatible extender
- Audio Video Converter : HDMI-Compatible Transmitter Receiver
- support HDMI-Compatible 1.3 : support For HDCP 1.2

4. HIGH QUALITY AUDIO MIXER

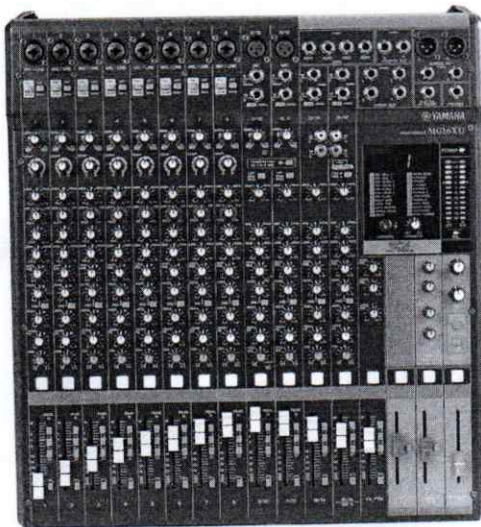

- Analog Mixer Features:
 - D-PRE mic preamps deliver clean, transparent, and natural sound
 - 3-band EQ on all mono channels for sound-shaping
 - 1-knob compressors provide straightforward dynamics control
 - USB 2.0 for recording and playback with computers and tablets
 - SPX effect processors provide you with a comprehensive suite of 24 effects
 - Pad switch on mono inputs for managing loud sources
 - Metal chassis for durability
- Tech Specs: Type:
- Analog Channels: 16 Computer Connectivity: USB (2 x 2)
- Faders: 16 Faders Inputs - Mic Preamps: 8 x XLR/TRS Combo, 2 x XLR, 4 x TRS Phantom
- Power: 12 Inputs - Line: 4 x TRS Inputs -
- Other: 2 x RCA (Stereo) Outputs - Main: 2 x XLR, 4 x TRS Outputs Direct: 4 x TRS Outputs - Other: 1 x TRS (Footswitch) Aux Sends: 1 x Pre, 1 x Post/Pre, 2 x Post Send/Return I/O: 4 x TRS (Send) Busses/Groups: 4 x Groups
- Headphones: 1 x 1/4"
- USB: 1 x Type B EQ
- Bands: 3-Band,

Digitally signed by Kuyong
Usay Jam
aro Jr.
Date: 2022.08.25 14:17:
45+08'00'

- Sweep able Mid Effects: Yes
- Software: Cubase AI DAW software (download)
- Rack-mountable: Yes

5. POWERED SPEAKER



- Powered : Yes
 - LF Driver: 10" Cone, 2" Voice Coil Ferrite Magnet
 - HF Driver: 1" Throat Compression
 - Amplifier: Bi-amplified Class D
 - Output Power Peak: 700W (500W LF, 200W HF)
 - Output Power Continuous: 325W (260W LF, 65W HF)
 - Frequency Response: 55Hz-20kHz (-10dB)
 - Maximum Peak SPL: 129dB
 - Crossover Frequency: 2.1kHz
 - Enclosure: Plastic
 - Mounting: Pole, Floor, Wedge
 - Inputs: 1 x XLR/TRS Combo (Mic/Line) , 1 x XLR/TRS Combo (line only), 1 x Stereo
 - Outputs: 1 x XLR
- Controls: Power Switch, 3 x Level Knobs, Mic/Line Switch, D-Contour (FOH, Off,

Digitally signed
by Kuyong
Usay Jamaro Jr.
Date: 2022.08.25
14:17:58+08'00'

1. CATx VGA, USB Computer Access Module

CAMs allow the user to connect multiple different machine platforms to an Adder CATx switch or KVM extender. CATx PS2/PS2A Computer Access Module (CAM) allows connections to machines with, VGA, Audio and USB ports.



Digitally signed
by Kuyong
Usay Jamaro Jr.
Date: 2022.08.25
14:18:16+08'00'